



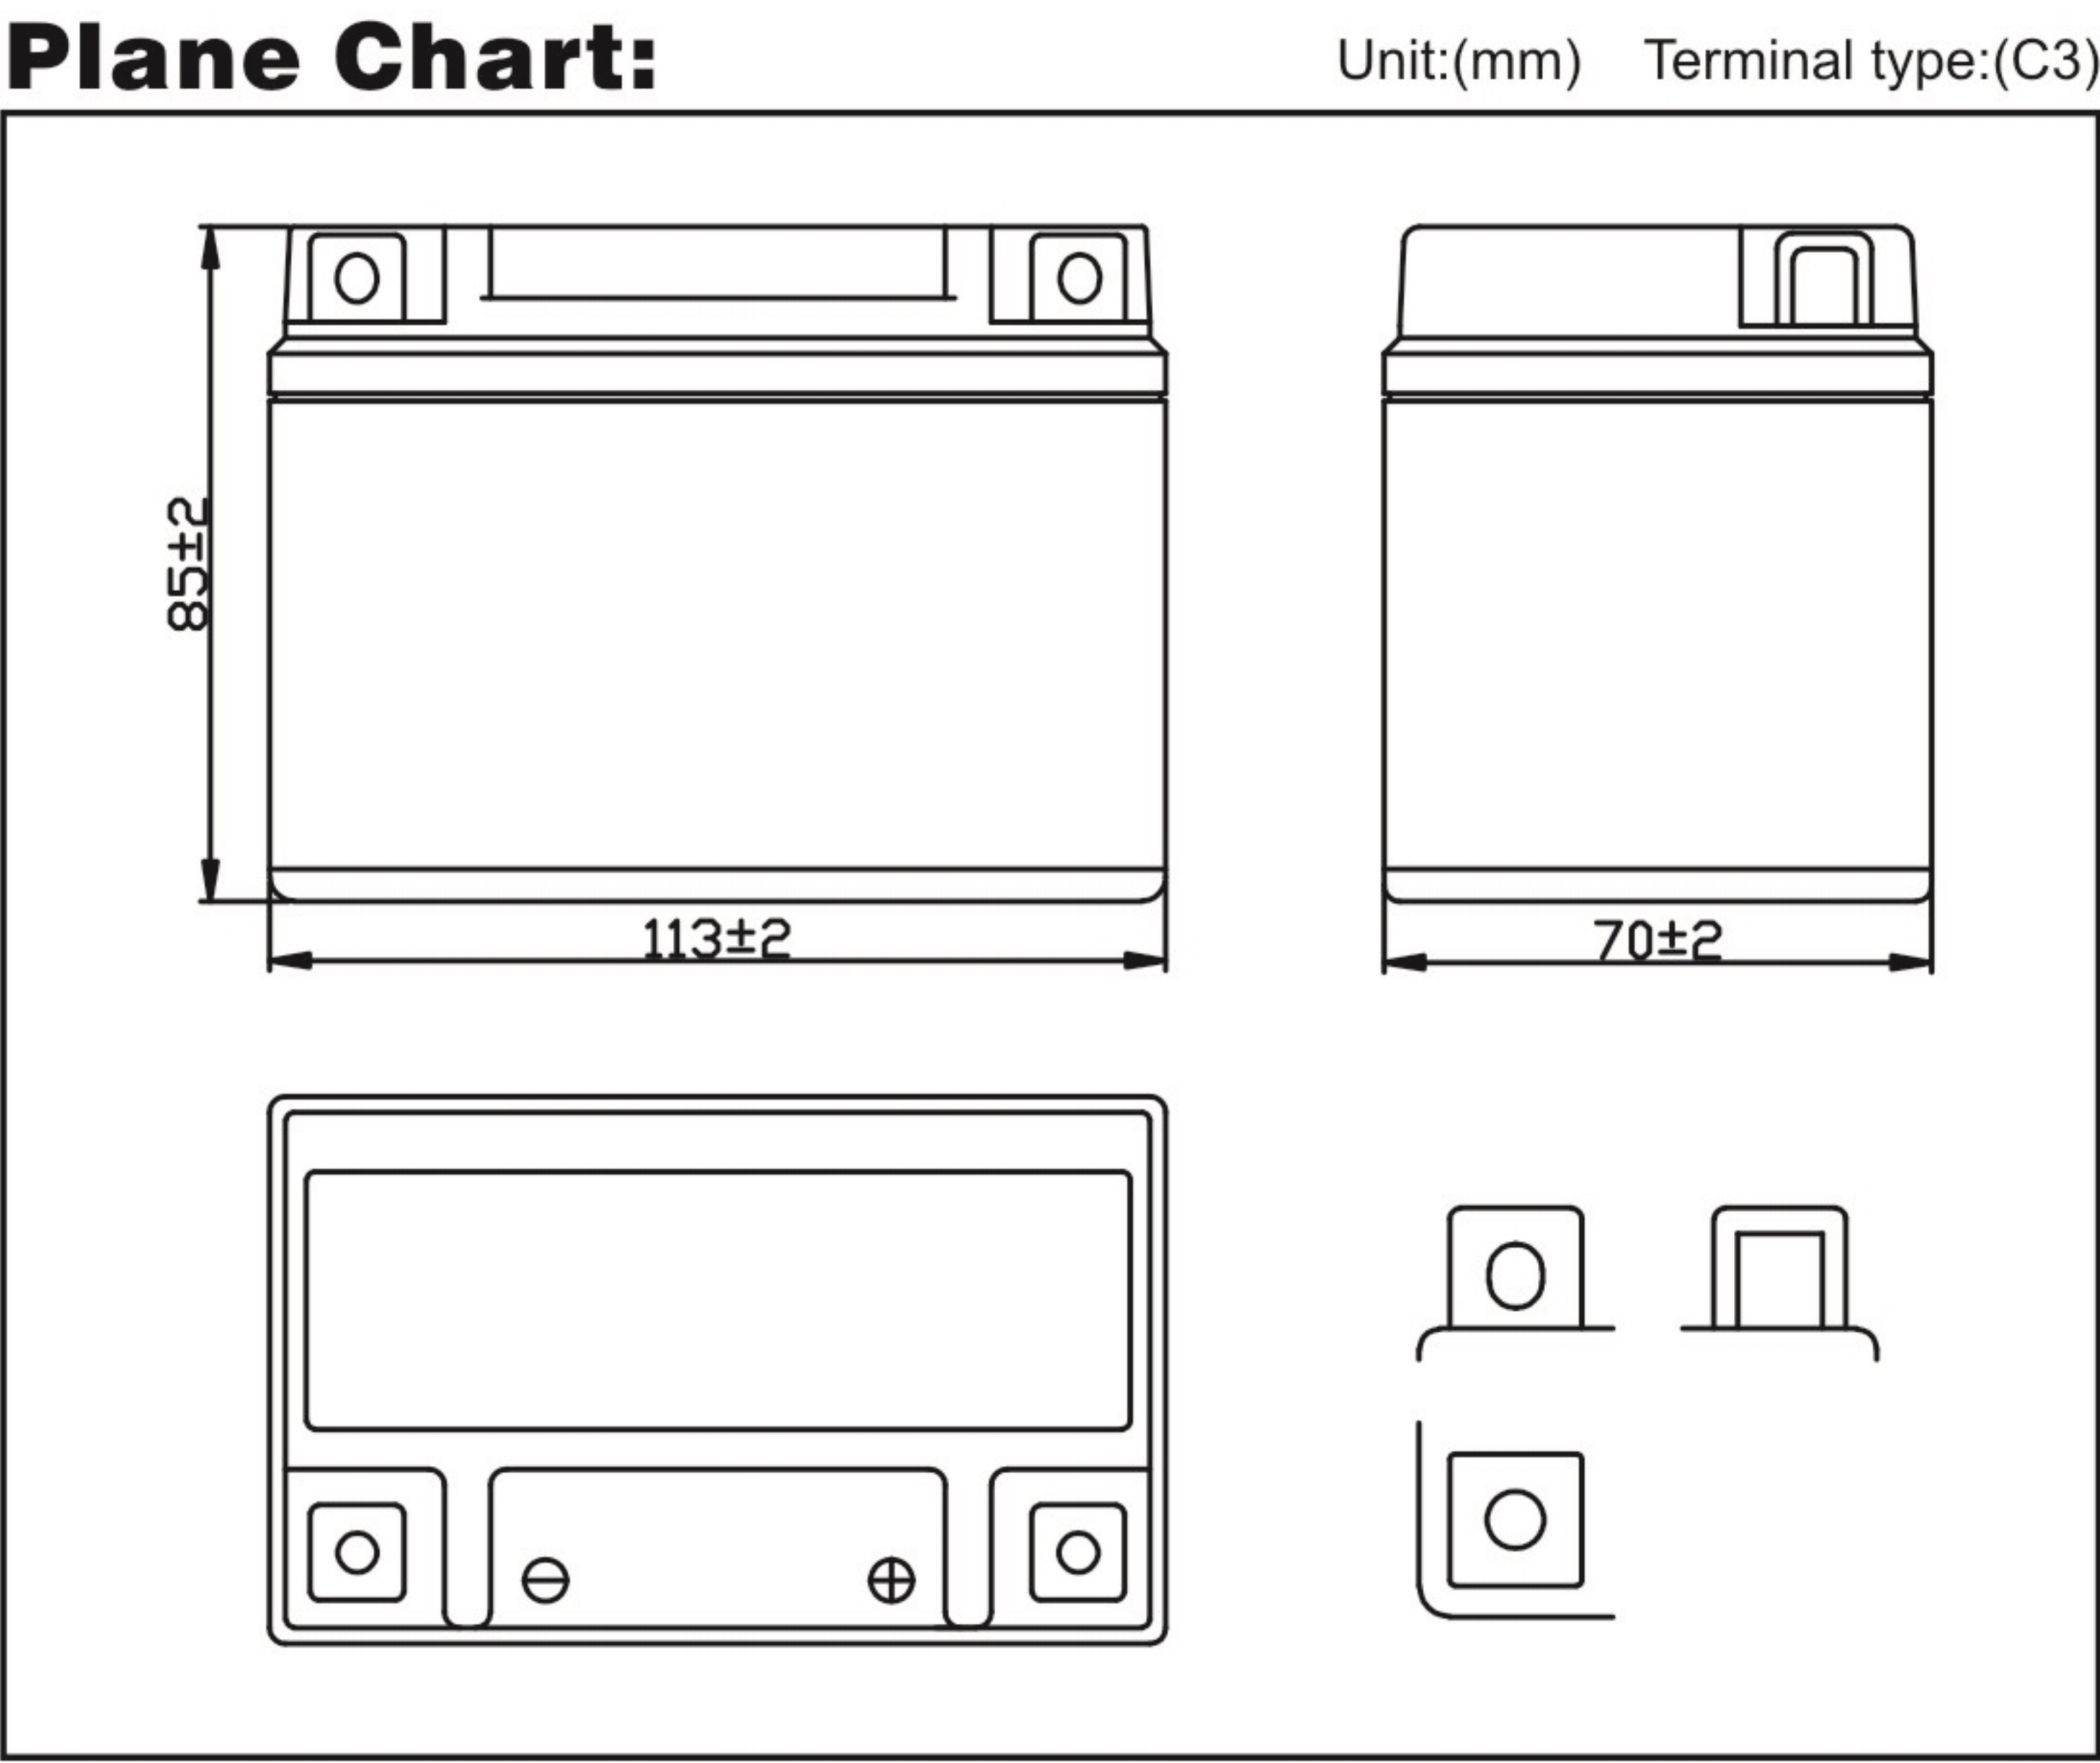

CHARACTERISTIC OF VALVE REGULATED FACTORY ACTIVATED LEAD ACID BATTERY

MODEL: UTX4L-BS(MF)

NO.: 301030005-00030

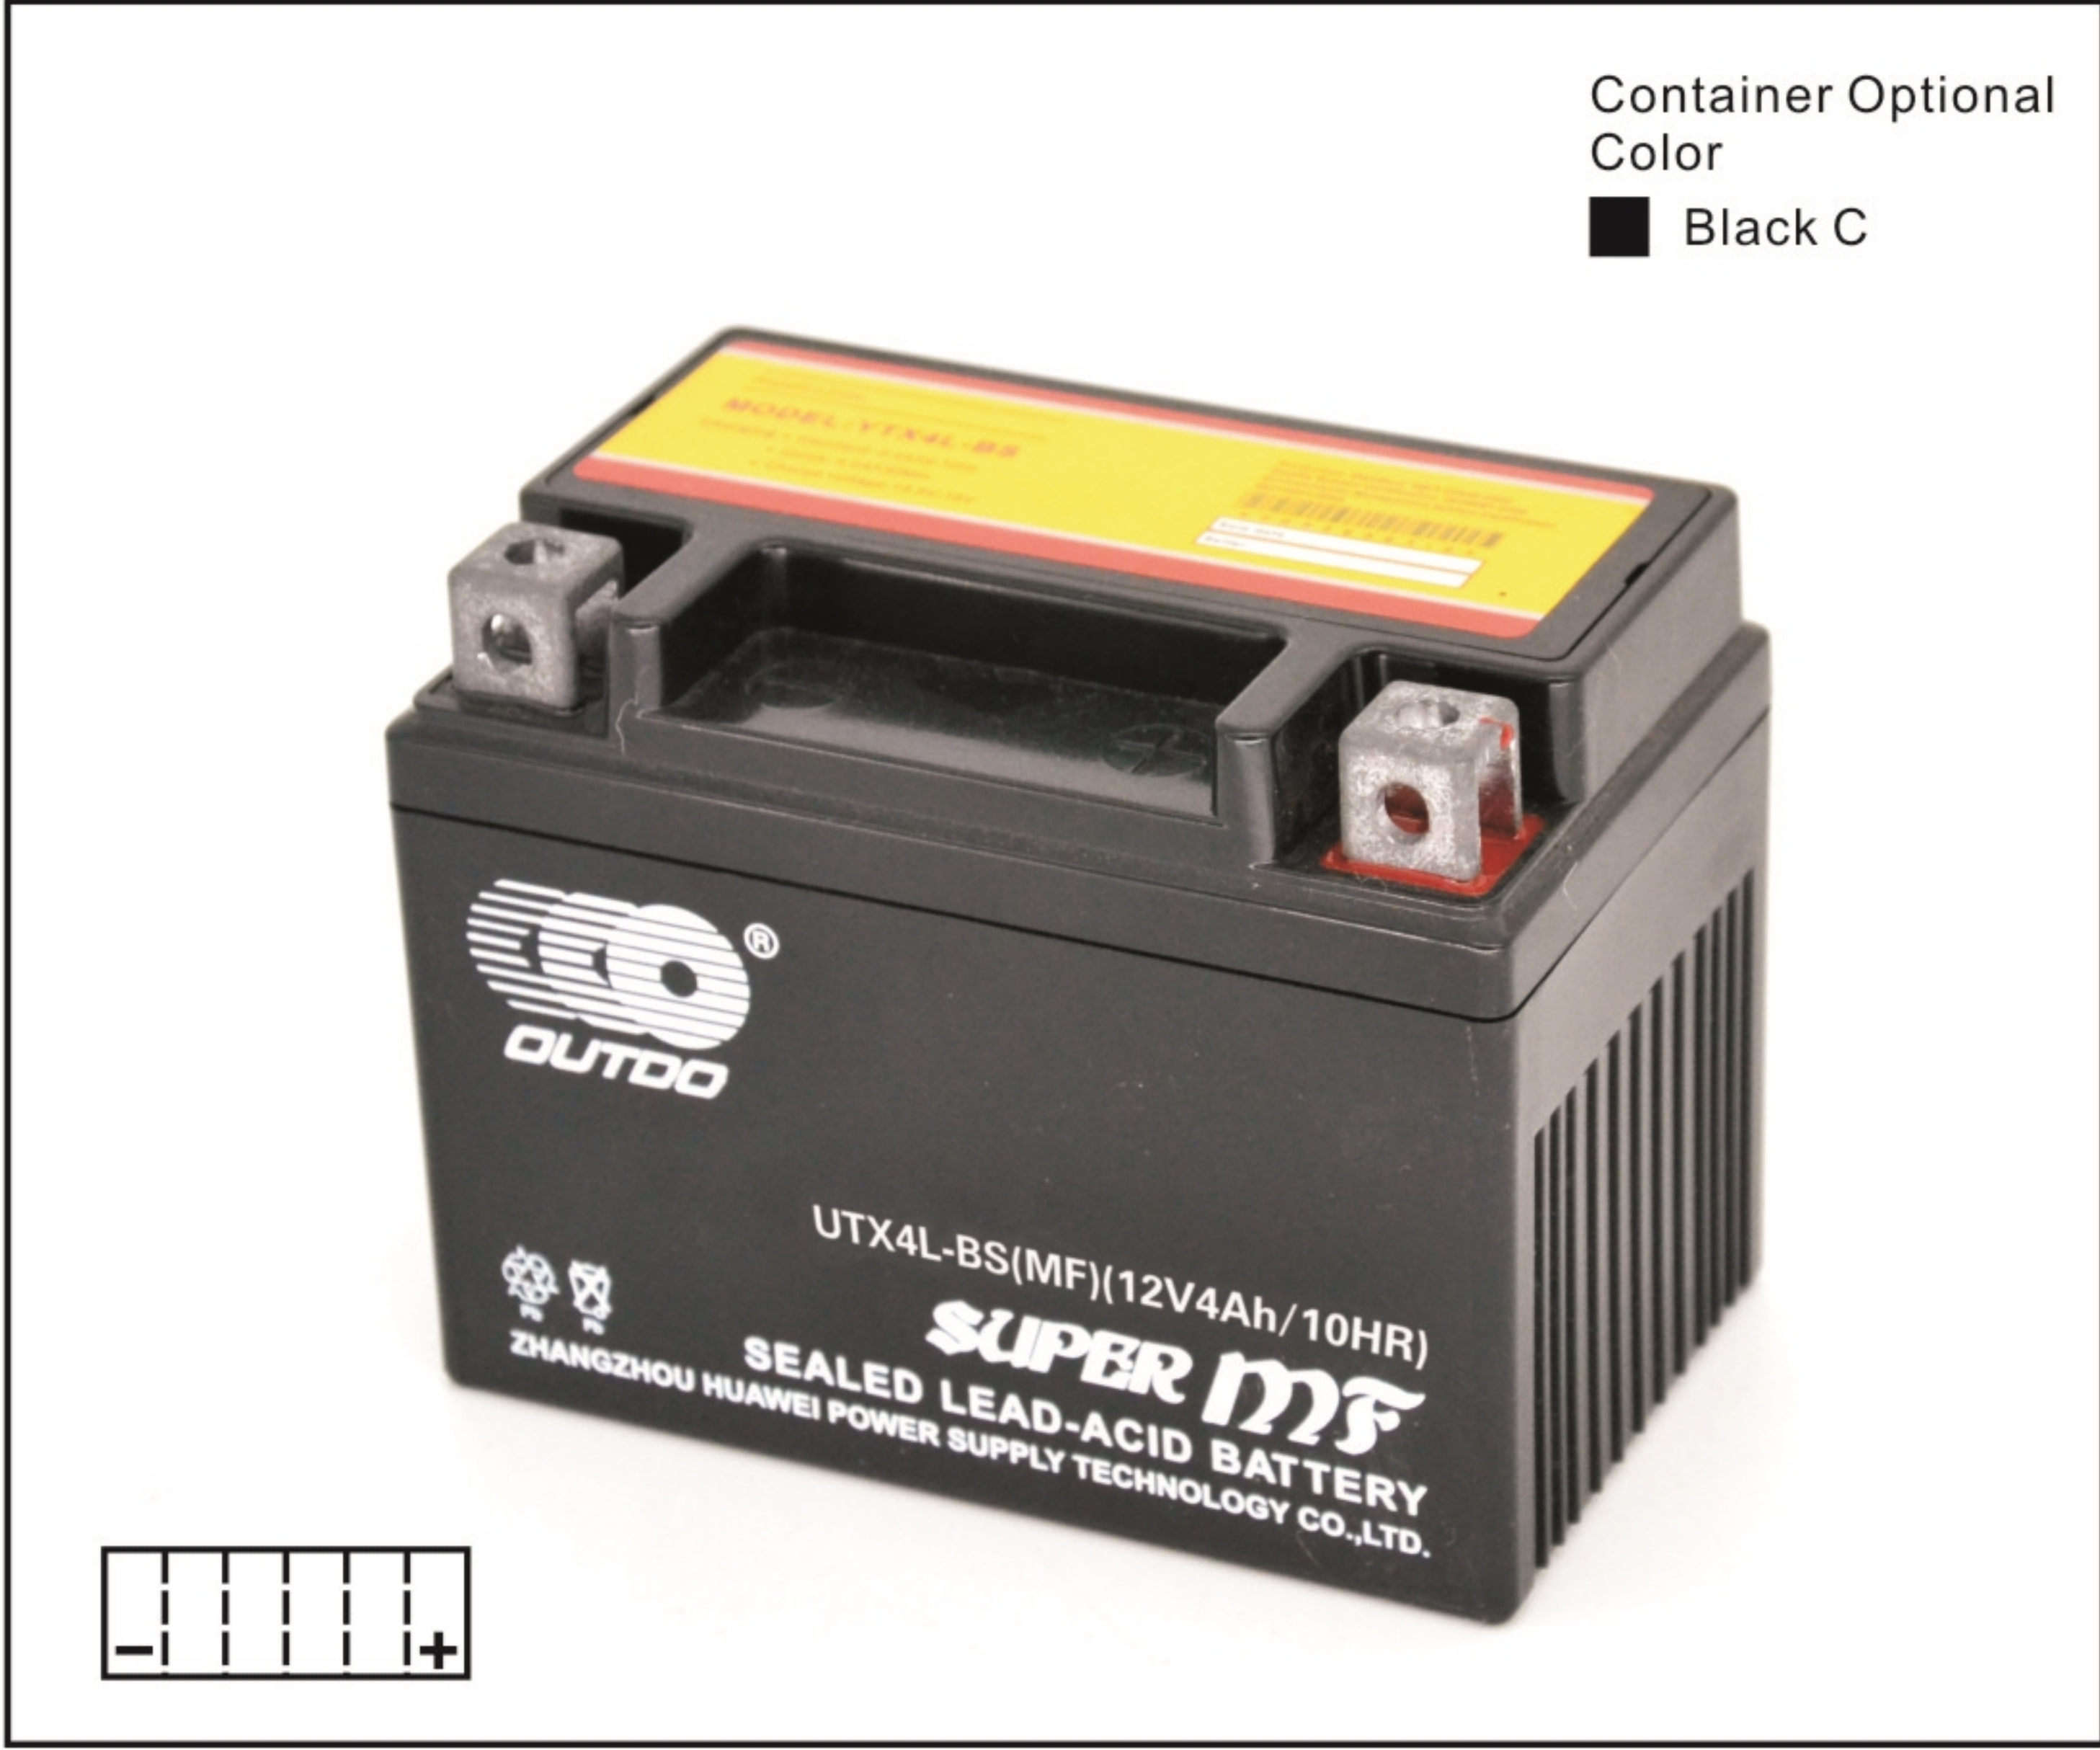

Parts:

Executed Standard: JISD 5302-2004

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safty Valve	Seal Glue
ABS	ABS	Pb	PbO2	Pb	AGM	dilute sulphuric acid	Rubber	Epoxy Resin


Parameter Chart:

Volts		12V	
Capacity (25°C)		10 hours rate	4Ah
Appx.Dimension (mm)	L±2		113
	W±2		70
	H±2		85
Storage Status		Wet	
Weight (Approx)		1.3Kg	
Retention of Charge Storage @25 °C			
1 month	97%	Directly Mounted	
3 month	90%	Directly Mounted	
6 month	80%	Constant Volts:14.4V Limit Current:0.8A Charging Hours:2-3H	
12 month	40%	Constant Volts:14.4V Limit Current:0.8A Charging Hours:4-6H	
CCA		Factory Standard (-10°C)	Factory Standard (-18°C)
Discharging Current		30A	45A

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

★The different item No. of battery can be developed according to the customer's demand.

Discharge Current 25°C

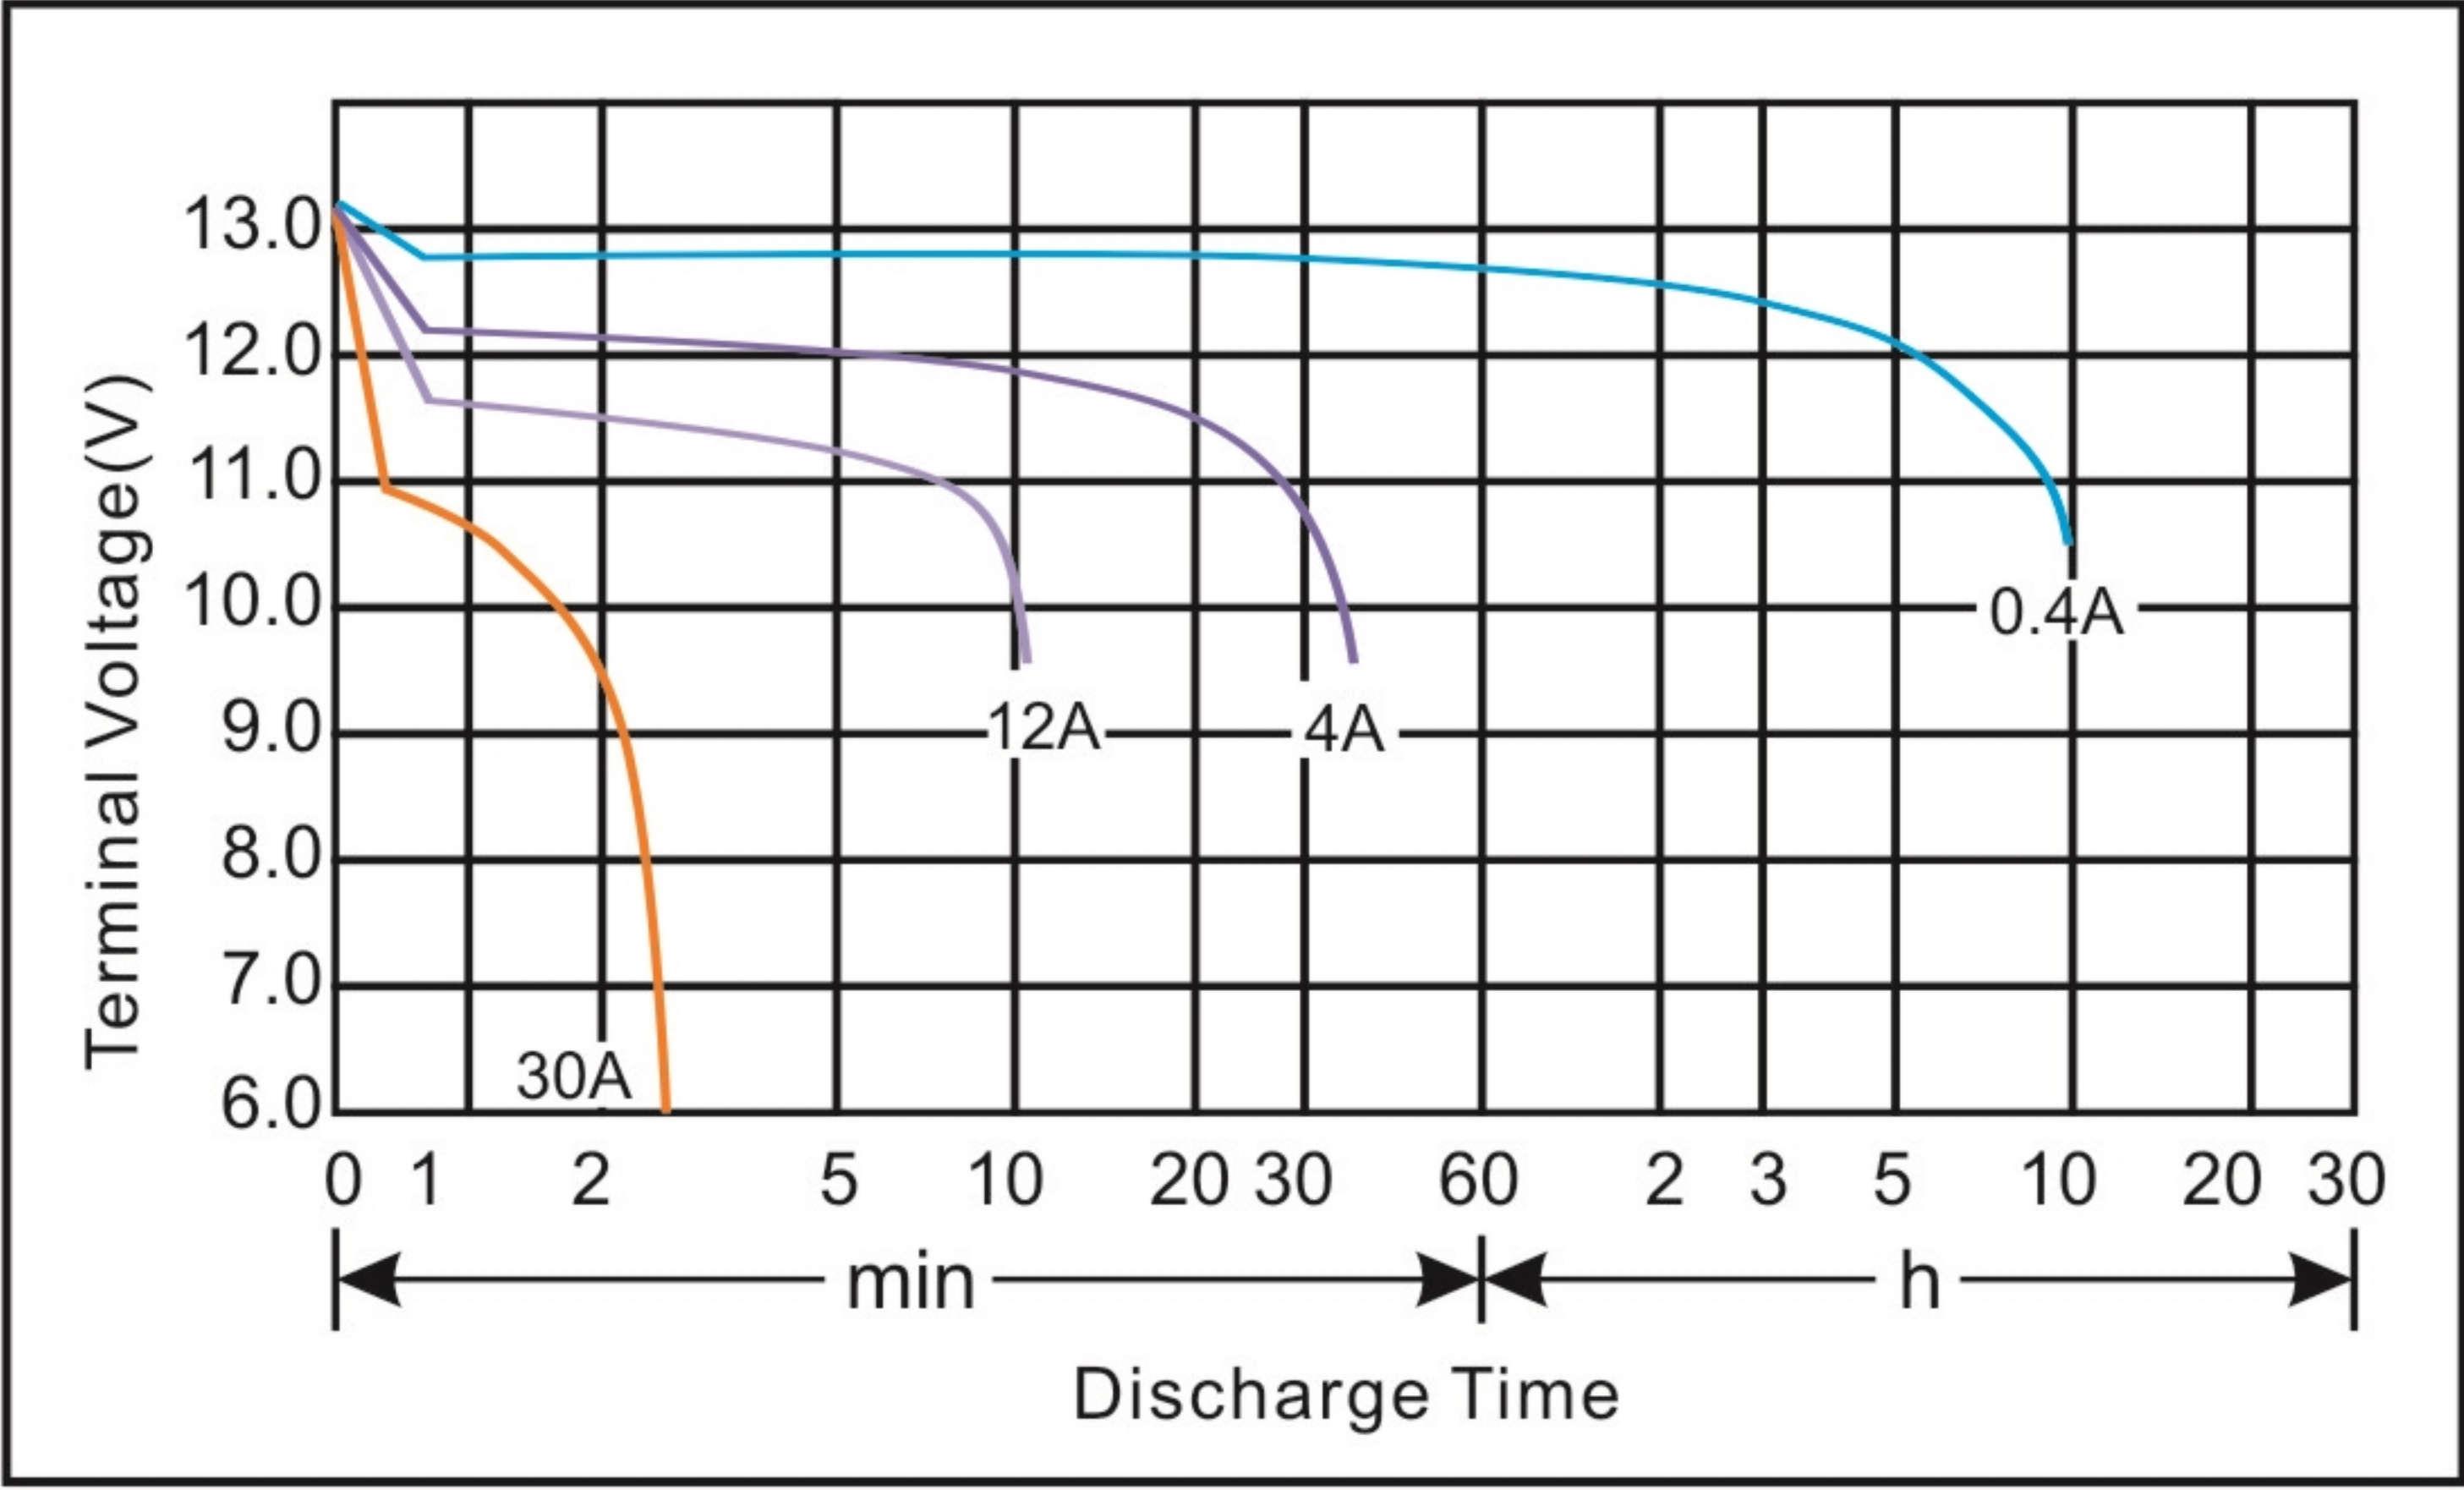

Residual Capacity

