



CHARACTERISTIC OF VALVE REGULATED FACTORY ACTIVATED LEAD ACID BATTERY

MODEL: YB5L-BS(MF)


NO.:301030005-00004



Container Color
 ■ Black C

Plane Chart:

Unit:(mm) Terminal type:(C1)

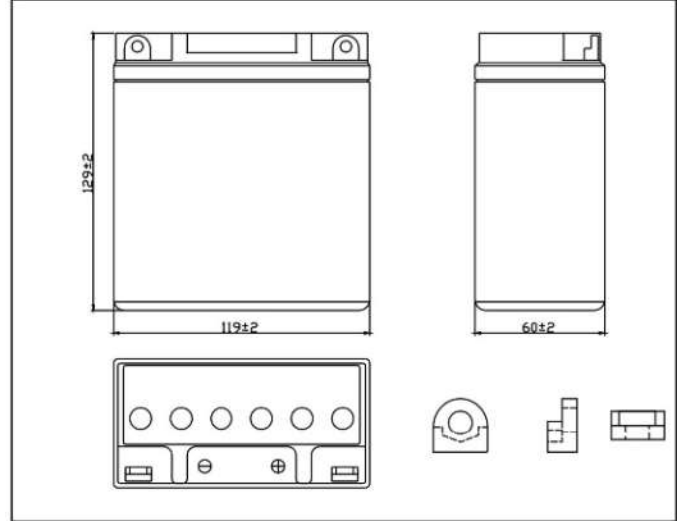

Parts:

Executed Standard:JISD 5302-2004

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safty Valve	Seal Glue
ABS	ABS	Pb	PbO2	Pb	AGM	dilute sulphuric acid	Rubber	Epoxy Resin


Parameter Chart:

Volts	12V	
Capacity (25°C)	10 hours rate	5Ah
Appx.Dimension (mm)	L±2	119
	W±2	60
	H±2	129
Storage Status	Wet	
Weight (Approx)	1.77Kg	


Retention of Charge Storage @25°C

1 month	97%	Directly Mounted
3 month	90%	Directly Mounted
6 month	80%	Constant Volts:14.4V Limit Current:1A Charging Hours:2-3H
12 month	40%	Constant Volts:14.4V Limit Current:1A Charging Hours:4-6H
CCA	Factory Standard (-10°C)	Factory Standard (-18°C)
Discharging Current	40A	55A

Discharge Current 25°C

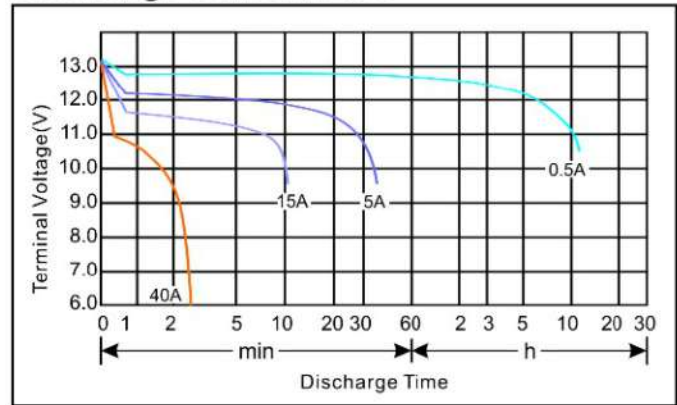

Residual Capacity

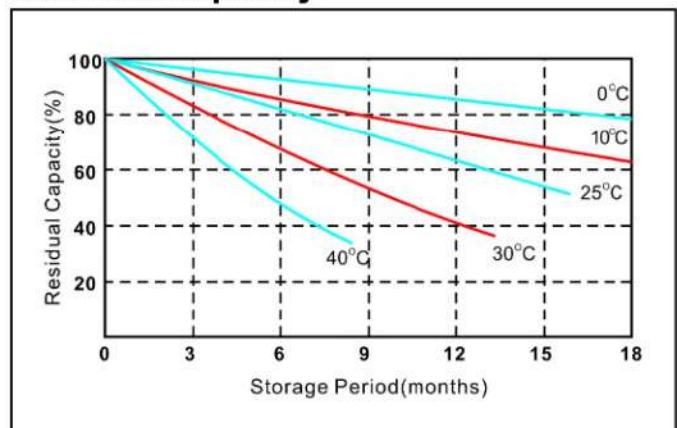

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

★The different item No. of battery can be developed according to the customer's demand.