



CHARACTERISTIC OF VALVE REGULATED FACTORY ACTIVATED LEAD ACID BATTERY


MODEL: YB9L-BS(MF)



Container Optional Color
 ■ Black C

Plane Chart:

Unit:(mm) Terminal type:(C2)

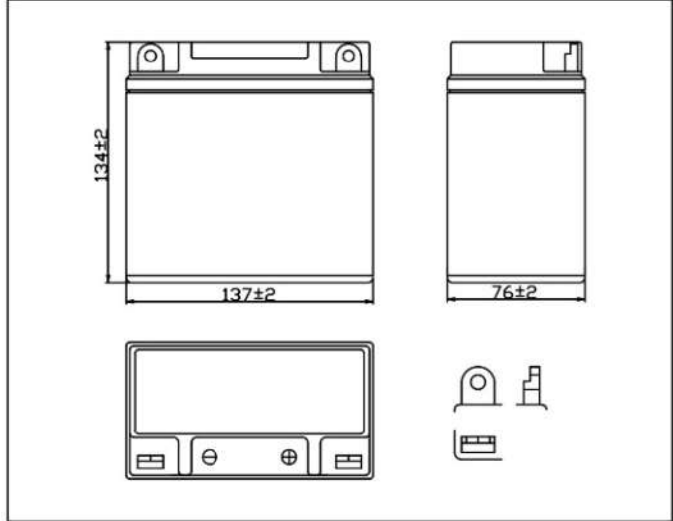

Parts:


Executed Standard: JISD 5302-2004

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safety Valve	Seal Glue
ABS	ABS	Pb	PbO ₂	Pb	AGM	dilute sulphuric acid	Rubber	Epoxy Resin

Parameter Chart:


Volts	12V	
Capacity (25°C)	10 hours rate	9Ah
Appx. Dimension (mm)	L±2	137
	W±2	76
	H±2	134
Storage Status	Wet	
Weight (Approx)	2.7Kg	

Discharge Current 25°C

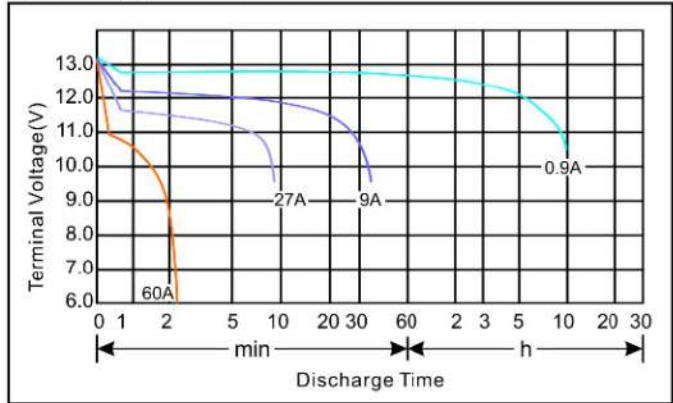

Retention of Charge Storage @25°C		
1 month	97%	Directly Mounted
3 month	90%	Directly Mounted
6 month	80%	Constant Volts:14.4V Limit Current:1.8A Charging Hours:2-3H
12 month	40%	Constant Volts:14.4V Limit Current:1.8A Charging Hours:4-6H
CCA	Factory Standard (-10°C)	Factory Standard (-18°C)
Discharging Current	60A	85A

Residual Capacity

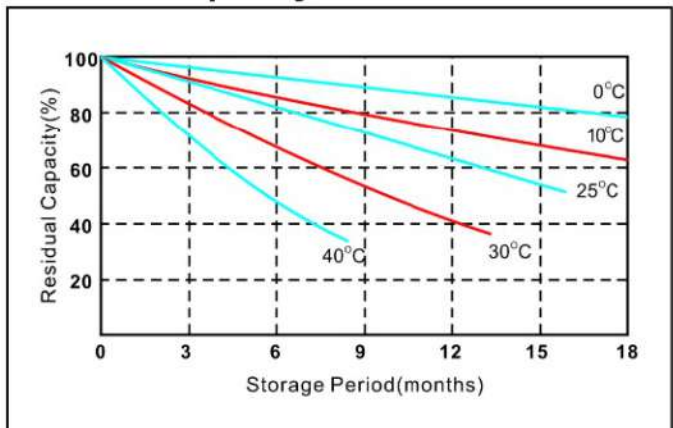

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

★The different item No. of battery can be developed according to the customer's demand.